

Practitioner's Docket No. 60860-706

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Johnson et al Group No.: Unassigned
Application No.: 0xxxx Unassigned
Filed: 07-07-03 Examiner: Unassigned
For: METHOD OF MAKING A STATOR FOR A MOTOR

Assistant Commissioner for Patents

~~Washington, D.C. 20231~~ P.O. Box 1450
Alexandria, VA 22313-1450

TRANSMITTAL OF CERTIFIED COPY

Attached please find the certified copy of the foreign application from which priority is claimed for this case:

Country: United Kingdom

Application

Number: 0217259.1

Filing Date: July 25, 2002

WARNING: "When a document that is required by statute to be certified must be filed, a copy, including a photocopy or facsimile transmission of the certification is not acceptable." 37 C.F.R. § 1.4(f) (emphasis added).

SIGNATURE OF PRACTITIONER

Reg. No. 41,908

William F. Kolakowski III

(type or print name of practitioner)

Tel. No. (248) 203-0822

Dykema Gossett PLLC
38577 Woodward Avenue

Customer No.: 26127

P.O. Address Suite 300
Bloomfield Hills, MI 48304

NOTE: The claim to priority need be in no special form and may be made by the attorney or agent, if the foreign application is referred to in the oath or declaration, as required by § 1.63.

CERTIFICATE OF MAILING (37 C.F.R. § 1.8a)

I hereby certify that this correspondence is, on the date shown below is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to the Assistant Commissioner for Patents, ~~Washington, D.C. 20231~~, P.O. Box 1450, Alexandria, VA 22313-1450.

SignatureDate: 7-7-03

(type or print name of person certifying)

(Transmittal of Certified Copy [5-4])



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed:

Dated 3 June 2003




Patents Form 1/77

Patents Act 1977
(Rule 16)

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

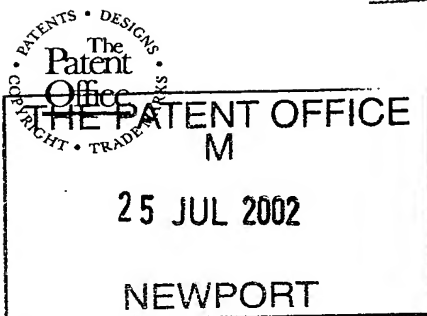

25JUL02 E736032-2 002811
P01/7700 0.00-0217259.1

1/77

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

A10637GB-DJL/scf

2. Patent application number
(The Patent Office will fill in this part)

0217259.1

25 JUL 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Dana Automotive Limited
Wood Lane
Erdington
Birmingham B24 9QS

Patents ADP number (if you know it)

8332326000

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Method of Making a Stator for a Motor

5. Name of your agent (if you have one)

Forrester Ketley & Co.

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Chamberlain House
Paradise Place
Birmingham
B3 3HP

Patents ADP number (if you know it)

133005

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

8

Claim(s)

4

Abstract

1

Drawing(s)

3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Forrester Ketley & Co.

Date

24 July 2002

Forrester Ketley & Co.

12. Name and daytime telephone number of person to contact in the United Kingdom

D J Lucking
0121 236 0484

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

PATENTS ACT 1977

A10637GB-DJL

Title: Method of Making a Stator for a Motor

Description of Invention

This invention relates to a method of making a stator for a motor, of the kind including a plurality of stacked laminations.

Stators are known, for example for brushless motors, which include a plurality of generally radially extending pole pieces upon which coils are wound. Conventionally such pole pieces extend radially inwardly from an outer stator ring and the coils are wound onto the pole pieces from the interior of the stator ring.

In US patent number 5134327 there is disclosed a stator which has an inner stator part, the stator pole pieces extend radially outwardly from an inner stator ring, so that the coils can be wound onto the pole pieces exteriorly. The stator includes an external stator part, also in the form of a ring, which is assembled and connected to the inner stator part upon relative sliding, the inner and outer stator parts being a push fit.

Whereas this arrangement provides advantages over the conventional arrangement described above, assembling the inner and outer stator parts as a push fit can be problematical.

According to a first aspect of the invention we provide a method of making a motor stator including an inner stator part and an outer stator part, the method including placing the inner stator part inside the outer stator part, and rotating the inner stator part with respect to the outer stator part such that the inner stator part is retained with respect to the outer stator part by means of an interference fit.

Thus by making the stator by the method of the invention, the difficulties of achieving a satisfactory push fit by simple relative sliding, as in US5134327 are overcome. Moreover, a clearance may be provided between the inner and outer stator parts prior to relatively rotating and so placing the inner stator part within the outer stator part may readily be achieved by relative sliding without there being any resistance to sliding. Because of this it is possible to form the inner and outer stator parts from laminations economically from a common area of metal sheet material.

Thus the method may include the steps of forming from metal sheet material a plurality of laminations, each lamination including a first lamination part and a second lamination part, either at least one of the first lamination parts being formed from material surrounding one of the second lamination parts or at least one of the second lamination parts being formed from material removed from the interior of one of the first lamination parts, stacking a plurality of first lamination parts to form the outer stator part, and stacking a plurality of second lamination parts to form the inner stator part.

Desirably the inner stator part includes an inner stator ring from which extend radially outwardly a plurality of stator pole pieces onto which coils are wound prior to placing the inner stator part in the outer stator part. The inner stator ring may simply be thin walled so as to provide a substantial resistance to transmission of magnetic flux from one pole to the next, but alternatively or additionally, the inner stator ring wall may be provided with thinned regions between the poles to provide localised high magnetic resistance locations. In another example, the pole pieces are provided by separate components, and are assembled to provide an inner stator part with an inner ring wall by non-metallic material such as an insulating resin.

In each case, the inner stator ring primarily provides support for the pole pieces whilst the coils are wound onto the pole pieces, the mechanical strength

of the inner stator part being maximised upon placing the inner stator part within the outer stator part.

To permit the inner stator part to be placed within the outer stator part, the outer stator part may include a plurality of axially extending recesses, one for each pole piece of the inner stator part, end surfaces of the pole pieces upon relative rotation of the inner and outer stator parts, engaging with areas of an inner wall of the outer stator part as an interference fit. If desired, the end surfaces of the pole pieces and/or the areas of the inner wall with which they engage, may be shaped so that as the inner and outer stator parts are relatively rotated upon assembly, the interference between the end surfaces and the areas of the inner wall of the outer stator part increases. If desired, the end surfaces of the pole pieces and/or the areas of the inner wall with which they engage, may instead or additionally each include a protuberance which enhances the interference fit between the pole piece end surfaces and the inner wall areas.

According to a second aspect of the invention we provide a method of making a motor stator including a plurality of laminations, the method including the steps of forming from metal sheet material a plurality of laminations, each lamination including a first lamination part and a second lamination part, either at least one of the first lamination parts being formed from material surrounding one of the second lamination parts or at least one of the second lamination parts being formed from material removed from the interior of one of the first lamination parts, stacking a plurality of first lamination parts to form an outer stator part, stacking a plurality of second lamination parts to form an inner stator part, and assembling the inner and outer stator parts to form the stator.

According to a third aspect of the invention we provide a method of making a motor stator including a plurality of laminations, the method including the steps of forming from metal sheet material a plurality of laminations, each lamination including a first lamination part and a second

lamination part, either at least one of the first lamination parts being formed from material surrounding one of the second lamination parts or at least one of the second lamination parts being formed from material removed from the interior of one of the first lamination parts, stacking a plurality of first lamination parts to form an outer stator part, stacking a plurality of second lamination parts to form an inner stator part, placing the inner stator part inside the outer stator part, and rotating the inner stator part with respect to the outer stator part such that the inner stator part is retained with respect to the outer stator part by means of an interference fit.

According to a fourth aspect of the invention we provide a motor including a stator made by a method according to any one of the preceding claims.

Embodiments of the invention will now be described with the aid of the accompanying drawings in which:-

FIGURE 1 is an end view of a stator made by a method in accordance with the present invention, during assembly of inner and outer stator parts;

FIGURE 2 is an end view of the stator of figure 1 with the inner and outer stator parts more fully assembled;

FIGURE 3 is an enlarged view of part of the stator of figures 1 and 2;

FIGURE 4 is an illustrative view showing how laminations of the stator or figures 1 and 2 are formed.

FIGURE 5 is a view similar to figure 3, of an alternative embodiment.

Referring to figures 1 and 2 there is shown a stator 10 which includes an inner stator part 12 and an outer stator part 14. The inner stator part 12 includes an inner stator ring 15 which is generally cylindrical, and from which extend radially outwardly a plurality of axially extending stator pole pieces 16a, 16b etc. Each pole piece 16a, 16b etc. has in use, a coil of wire wound onto the pole piece although in the drawings for clarity, a single coil 17 is shown, wound about pole piece 16a.

In use the coils 17 are energised so that a rotor (not shown) of the motor is caused to rotate within the stator 10, in the inner space indicated at 19. The invention is particularly but not exclusively applicable where the stator 10 is for a brushless motor such as a DC brushless motor.

The inner stator ring 15 is thin walled so as to provide a substantial resistance to the transmission of magnetic flux generated at one pole, to the next pole. If necessary the inner ring 15 wall may include thinned regions between the poles, to provide local high magnetic resistance locations.

Because the pole pieces 16a, 16b etc. extend radially outwardly, the coils 17 may be wound onto the pole pieces 16a, 16b etc. from exteriorly of the inner stator part 12, prior to assembly with the outer stator part 14.

The outer stator part 14 is generally ring shaped in this example, and includes an outer stator ring 20 with a generally cylindrical inner wall 21. However the inner wall 21 includes a plurality of axially extending recesses or grooves 22a, 22b etc., there being a groove 22a, 22b etc. for each inner stator part pole piece 16a, 16b etc. Moreover the grooves 22a, 22b etc. and the pole pieces 16a, 16b etc. are generally evenly spaced around the stator axis A so that each pole piece 16a, 16b etc. may be aligned with a respective groove 22a, 22b etc. as shown in figure 1.

It can be seen that in this condition there is a clearance between the inner 12 and outer 14 stator parts so that the inner stator part 12, complete with coils 17 wound onto the pole pieces 16a, 16b etc. may be placed within the outer stator part 14 by relative axial sliding, without any frictional resistance or the like.

Referring particularly to figure 3, when the inner and outer stator parts 12, 14 are in their correct relative axial positions, the inner stator part 12 may be rotated relative to the outer stator part 14 so that end surfaces 25a, 25b etc. of the pole pieces 16a, 16b etc. move out of their respective grooves 22a, 22b etc.,

and engage adjacent areas 26a, 26b etc. of the inner wall 21 of the outer stator part 14.

It can be seen from figure 3 that the end surfaces 25a, 25b etc. of the pole pieces 16a, 16b etc. are shaped so that as the stator parts 12, 14 are relatively rotated (the inner stator part 12 being rotated clockwise relative to the outer stator part 14 in this example) an increasingly tight interference fit between the end surfaces 25a, 25b etc. and the areas 26a, 26b of the inner wall 21 is achieved. Thus upon sufficient relative rotation, a substantially tight fit between the inner and outer stator parts 12, 14 is achieved.

If desired, as indicated in figure 3 in dotted lines, one of, or each of the end surfaces 25a, 25b etc. and the areas 26a, 26b etc. with which they engage, may be provided with a protuberance 29 which may simply increase the effectiveness of the interference fit between the end surfaces 25a, 25b etc. and the areas 26a, 26b etc. with which they engage, or the protuberance on one only of the end surfaces 25a, 25b etc. and the areas 26a, 26b, may be received in a respective detent 30, to provide a yet more positive interference fit.

Preferably each of the stator parts 12, 14 are made from a plurality of lamination parts, stacked together with insulating bonding material such as a resin, therebetween.

By virtue of the relative rotation between the inner and outer stator parts 12, 14 required to achieve an interference fit between the stator parts 12, 14, and the clearance desirable between them prior to relative rotation to achieve the interference fit, the lamination parts may readily and most economically be made.

Referring to figure 4, an area of a thin metal sheet 32 is shown which has a thickness equivalent to the thickness of a single lamination for the stator 10. The metal sheet is typically a suitable grade of steel but another suitable metal sheet 32 may be provided.

Each stator lamination includes a first lamination part 33 for the outer stator part 14, and a second lamination part 34 for the inner stator part 12. In one example a first lamination part 33 is formed from the area of the metal sheet 32, and then subsequently, a second lamination part 34 is formed from material removed from the interior of the first lamination part 33. Thus only a relatively small amount of the area of the metal sheet between the first 33 and second 34 lamination parts indicated at 36 in figure 4, will be wasted.

In an alternative method, a second lamination part 34 is formed from the metal sheet 32 and then subsequently a first lamination part 33 is formed from the material surrounding the removed second lamination part 34. Again, only small area 36 of the metal sheet 32 between the first 33 and second 34 lamination parts will be wasted.

Although the metal sheet material 38 surrounding the removed first and second lamination parts 33, 34, and an area 37 internal of the second lamination part 34 will also be wasted, in each case there will be far less waste than with an arrangement in which the inner and outer stator parts 12, 14 achieve an interference fit upon relative sliding only, as each of the lamination parts 33, 34 would need to be provided from individual areas of the metal sheet 32.

Practically, when forming the lamination parts 33, 34, these may be formed simultaneously from the metal sheet 32 using suitable tooling, and indeed a plurality of laminations may be formed simultaneously by stacking metal sheets 32.

A plurality of the first lamination parts 33 may be stacked to provide the outer stator part 14, and a corresponding plurality of the second lamination parts 34 may be stacked to provide the inner stator part 12, but of course the first stator part 33 need not be in the same position in the outer stator part 14 stack as the second stator part 34 formed from the same area of the metal sheet in the inner stator part 12 stack.

Various modifications may be made without departing from the scope of the invention. For example, the inner and outer stator parts 12, 14 need not have the number of pole pieces 16a, 16b etc. and grooves 22a, 22b etc. respectively indented, but any desired number of poles for the stator 10 may be provided.

Whereas it is preferred for the end surfaces 25a, 25b etc. to be shaped as described, these may be of a simple cylindrical shape corresponding generally to the shape of the inner wall 21 of the outer stator part 14.

In another example the outer stator part 14 at least need not have a generally cylindrical outer configuration as indicated in the drawings, but an outer stator part 14 with any desired outer configuration may be provided.

The stator 10 may be of any desired axial extent, and a motor having a stator 10 made by the method of the invention may be used for any desired application, and may be of other than the DC brushless kind.

In another example shown in figure 5, instead of the inner stator ring 15 being formed in metal integrally with the pole pieces 16a, 16b etc. the pole pieces 16a, 16b etc. may be formed as separate components. These may or may not include a foot formation 40 or formations 40, 41 to facilitate assembling the separate pole pieces 16a, 16b etc. in non-metallic material, 43 such as an insulating resin, to provide an inner stator part 12. In such an arrangement, the poles of the stator 10 are insulated from each other by insulating parts 44 of the resin 43 or other non-metallic material between the pole pieces 16a, 16b etc. The individual pole piece components may be made from the area 33 of the metal sheet 32 as described above with reference to figure 4.

The features disclosed in the foregoing description, or the following claims, or the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for attaining the disclosed result, as appropriate, may, separately, or in any combination of such features, be utilised for realising the invention in diverse forms thereof.

CLAIMS

1. A method of making a motor stator including an inner stator part and an outer stator part, the method including placing the inner stator part inside the outer stator part, and rotating the inner stator part with respect to the outer stator part such that the inner stator part is retained with respect to the outer stator part by means of an interference fit.
2. A method according to claim 1 wherein a clearance is provided between the inner and outer stator parts prior to relatively rotating.
3. A method according to claim 1 or claim 2 wherein the inner and outer stator parts are formed from laminations.
4. A method according to claim 3 which includes the steps of forming from metal sheet material a plurality of laminations, each lamination including a first lamination part and a second lamination part, either at least one of the first lamination parts being formed from material surrounding one of the second lamination parts or at least one of the second lamination parts being formed from material removed from the interior of one of the first lamination parts, stacking a plurality of first lamination parts to form the outer stator part, and stacking a plurality of second lamination parts to form the inner stator part.
5. A method according to any one of the preceding claims wherein the inner stator part includes an inner stator ring from which extend radially outwardly a plurality of stator pole pieces, the method including winding onto the pole pieces coils prior to placing the inner stator part in the outer stator part.

6. A method according to claim 5 wherein the inner stator ring is thin walled so as to provide a substantial resistance to transmission of magnetic flux from one pole to the next.
7. A method according to claim 5 or claim 6 wherein the inner stator ring wall is provided with thinned regions between the poles to provide localised high magnetic resistance locations.
8. A method according to claim 5 wherein the pole pieces are provided by separate components, and are assembled to provide an inner stator part with an inner ring wall by non-metallic material.
9. A method according to any one of claims 5 to 8 wherein the outer stator part includes a plurality of axially extending recesses, one for each pole piece of the inner stator part, end surfaces of the pole pieces upon relative rotation of the inner and outer stator parts, engaging with areas of an inner wall of the outer stator part as an interference fit.
10. A method according to claim 9 wherein the end surfaces of the pole pieces and/or the areas of the inner wall with which they engage, are shaped so that as the inner and outer stator parts are relatively rotated upon assembly, the interference between the end surfaces and the areas of the inner wall of the outer stator part increases.
11. A method according to claim 9 or claim 10 wherein the end surfaces of the pole pieces and/or the areas of the inner wall with which they engage include a protuberance which enhances the interference fit between the pole piece end surfaces and the inner wall areas.

12. A method of making a motor stator including a plurality of laminations, the method including the steps of forming from metal sheet material a plurality of laminations, each lamination including a first lamination part and a second lamination part, either at least one of the first lamination parts being formed from material surrounding one of the second lamination parts or at least one of the second lamination parts being formed from material removed from the interior of one of the first lamination parts, stacking a plurality of first lamination parts to form an outer stator part, stacking a plurality of second lamination parts to form an inner stator part, and assembling the inner and outer stator parts to form the stator.
13. A method of making a motor stator including a plurality of laminations, the method including the steps of forming from metal sheet material a plurality of laminations, each lamination including a first lamination part and a second lamination part, either at least one of the first lamination parts being formed from material surrounding one of the second lamination parts or at least one of the second lamination parts being formed from material removed from the interior of one of the first lamination parts, stacking a plurality of first lamination parts to form an outer stator part, stacking a plurality of second lamination parts to form an inner stator part, placing the inner stator part inside the outer stator part, and rotating the inner stator part with respect to the outer stator part such that the inner stator part is retained with respect to the outer stator part by means of an interference fit.
14. A method of making a motor stator substantially as hereinbefore described with reference to and/or as shown in the accompanying drawings.

15. A motor including a stator made by a method according to any one of the preceding claims.

16. Any novel feature or novel combination of features described herein and/or in the accompanying drawings.

ABSTRACT

Title: Method of Making a Stator for a Motor

A method of making a motor stator 10 is disclosed in which the stator 10 includes an inner stator part 12 and an outer stator part 14, the method including placing the inner stator part 12 inside the outer stator part 14, and rotating the inner stator part 12 with respect to the outer stator part 14 such that the inner stator part 12 is retained with respect to the outer stator part 14 by means of an interference fit.



1 / 3

FIG 1

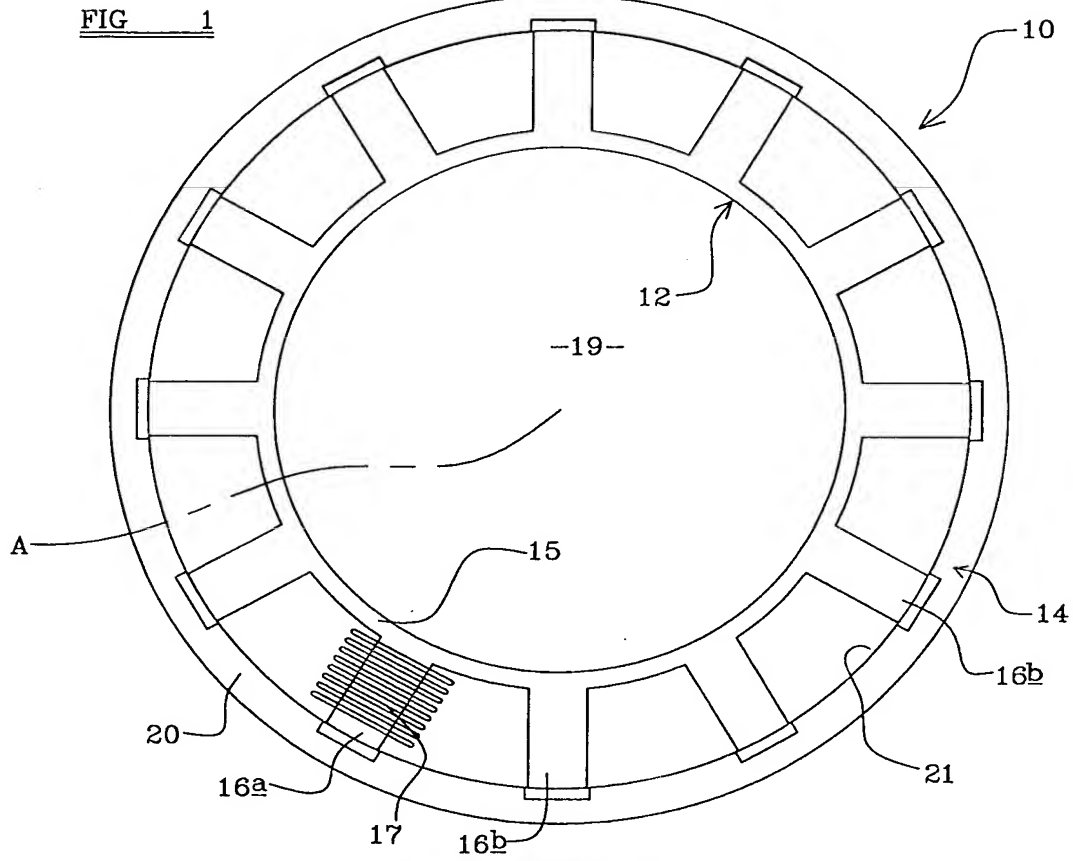
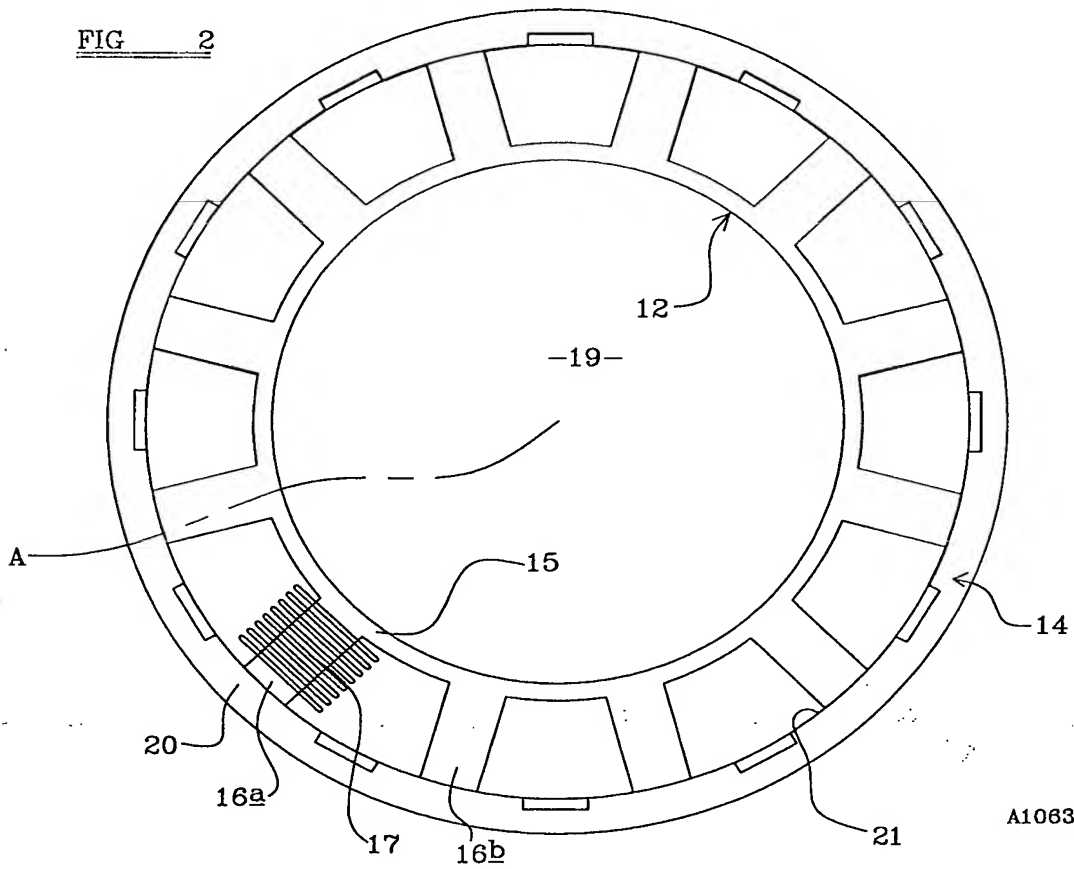
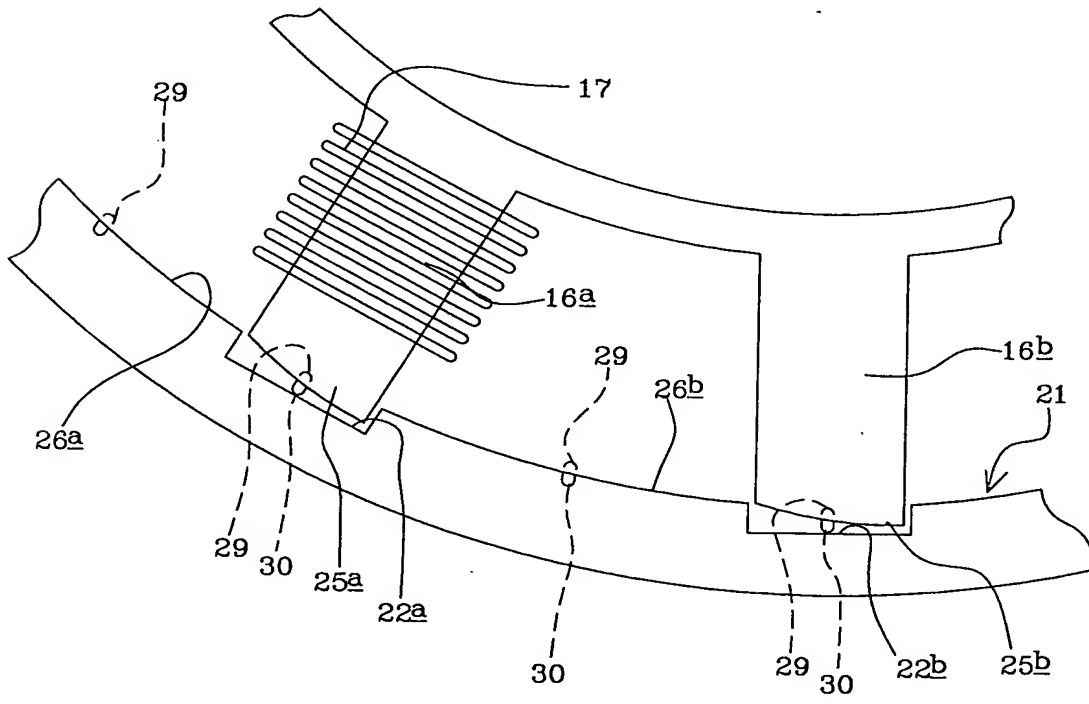
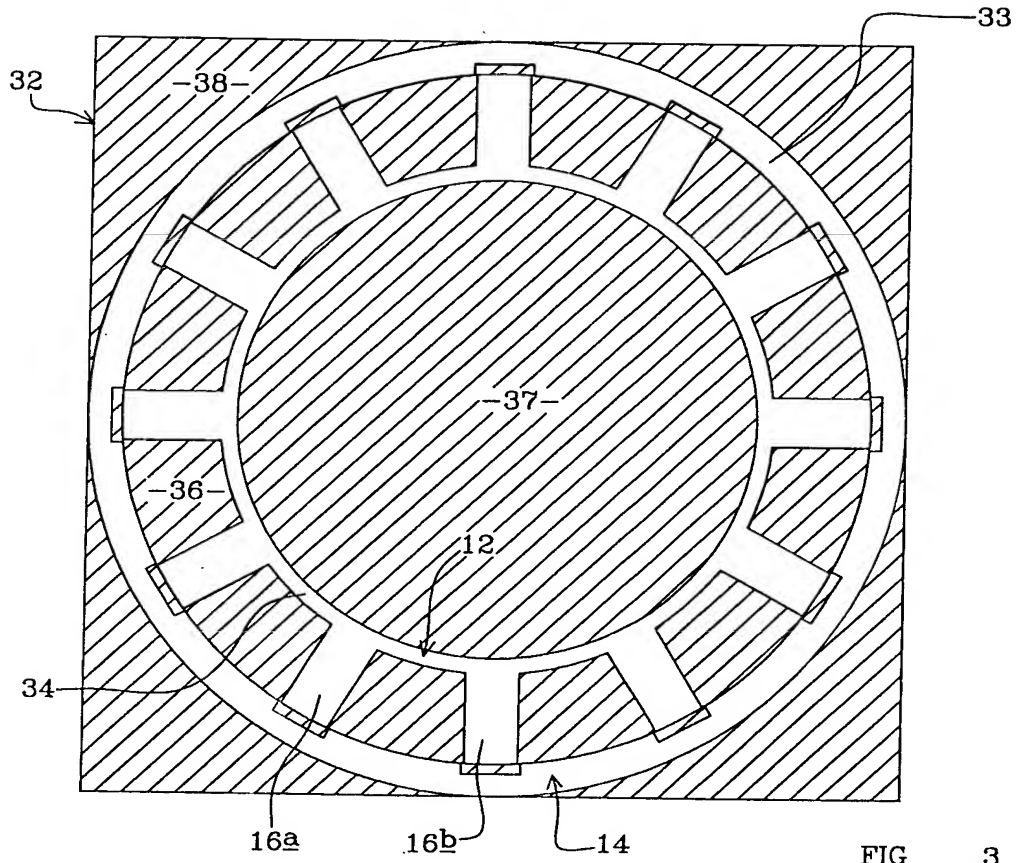


FIG 2









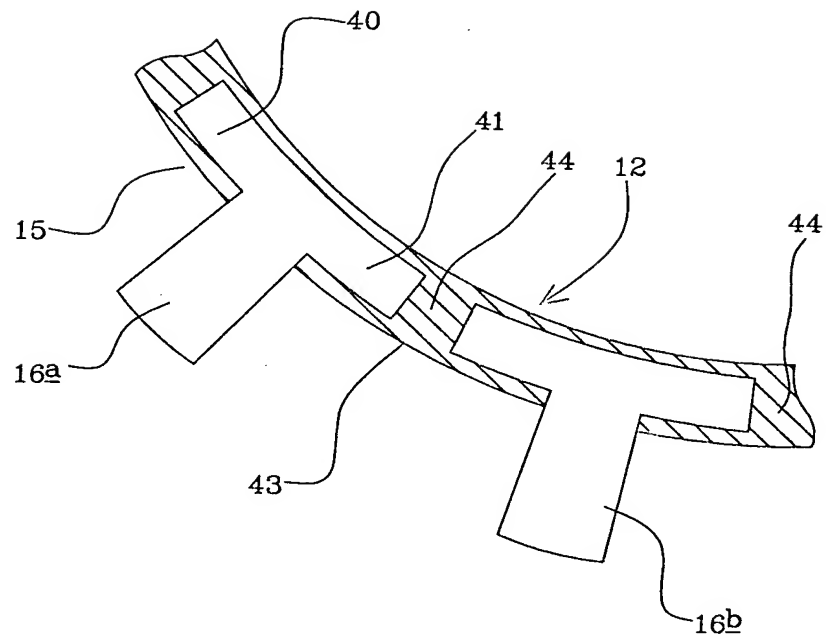


FIG 5



4